
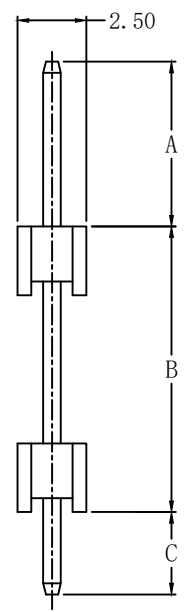


版次	变更内容	审核	日期

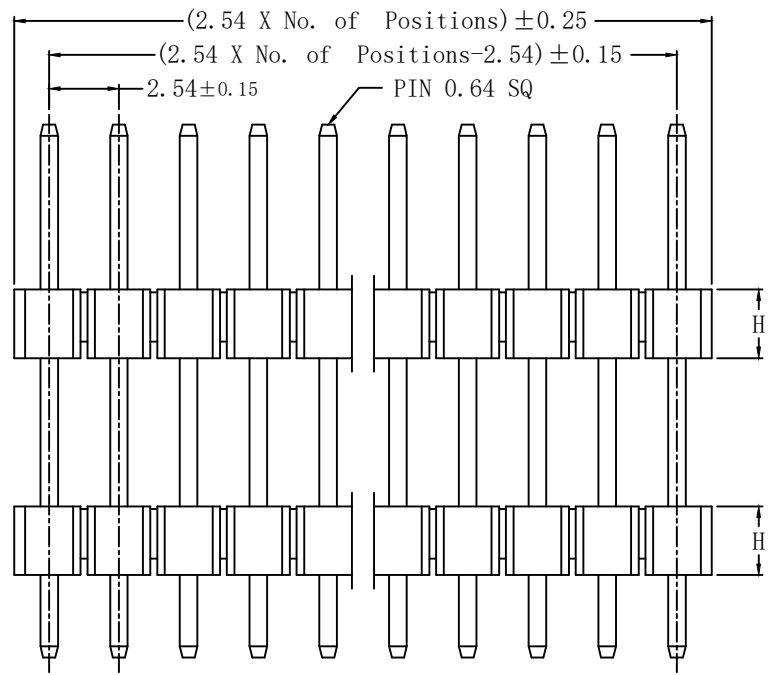

201DLS-1\*xxP G-A/ B/ C

芯数 ———— 针长  
01~40P (可订制)

电镀 ———— 塑胶总高度  
G: 镀金Gold Flash (可订制)  
1G: 镀金1u"  
3G: 镀金3u"  
(镀金可订制)

————— 针长  
(可订制)

"H"
2.50
1.50

弯曲度: 1\*02P ~ 1\*20P 0.30 MAX.  
1\*21P ~ 1\*30P 0.40 MAX.  
1\*31P ~ 1\*40P 0.50 MAX.

技术参数: SPECIFICATIONS

额定电流 (Current Rating): 3A  
 绝缘电阻 (Insulation Resistance): 1000MΩ Min.  
 额定电压 (Dielectric Withstanding Voltage): AC 500V  
 工作温度 (Operating Temperature): -40°C ~ +105°C  
 最大加工温度 (Max Processing Temp): (230°C for 30~60 seconds)  
 (260°C for 10 seconds)

接触材料 (Contact Material): 黄铜(Brass)  
 塑胶材料 (Insulator Material): 尼龙(Nylon)-9T, UL 94V-0; 颜色: 黑色  
 接触电镀 (Contact Plating): 镀金 (Gold plated)  
 (电镀规格可根据客户要求来定制)  
 Opitonal planting on request.



Recommended PCB Layout

公差:	版次:	A	上海宗进电子科技有限公司			
. X ±0.35 . XX ±0.25 . XXX ±2° LNLB	比例:		Shanghai Zong Jin Electron Technology Co.LTD			
	单位:	mm	型号:	201DLS-1*xxPG-A/B/C	签名	日期
	页码:	1/1	描述:	2.54单排双塑直脚排针	绘图:	
	图号:				确认:	
					审核:	