


版次	变更内容	审核	日期

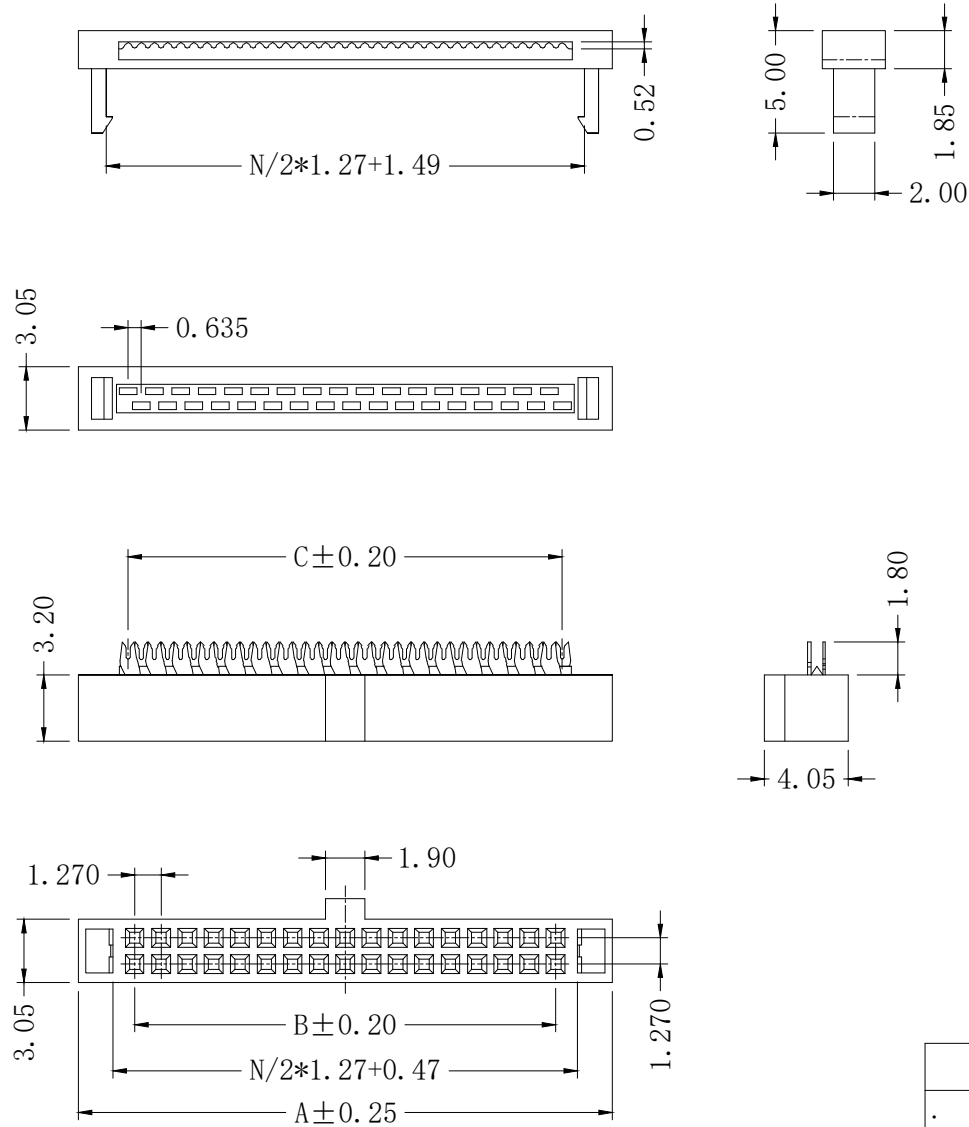

技术参数: SPECIFICATIONS

额定电流 (Current Rating): 1A
 绝缘电阻 (Insulation Resistance): 100MΩ Min. at 500V
 接触电阻 (Contact Resistance): 20mΩ Max.
 额定电压 (Dielectric Withstanding Voltage): AC 500V
 工作温度 (Operating Temperature): -40°C ~ +105°C
 接触材料 (Contact Material): 磷青铜 (Phosphor Bronze)
 塑胶材料 (Insulator Material): PBT, UL 94V-0
 接触电镀 (Contact Plating): 镀金 Gold Flash

Pos.	Dim A	Dim B	Dim C
6	8.00	2.54	3.175
8	9.27	3.81	4.445
10	10.54	5.08	5.715
12	11.81	6.35	6.985
14	13.08	7.62	8.255
16	14.35	8.89	9.525
18	15.62	10.16	10.795
20	16.89	11.43	12.065
22	18.16	10.16	13.335
24	19.43	13.97	14.605
26	20.70	15.24	15.875
28	21.97	16.51	17.145

Pos.	Dim A	Dim B	Dim C
30	23.24	17.78	18.415
32	24.51	19.05	19.685
34	25.78	20.32	20.955
36	27.05	21.59	22.225
40	29.59	24.13	24.765
44	32.13	26.67	27.305
50	35.94	30.48	31.115
60	42.29	36.83	37.465
64	44.83	39.37	40.005
68	47.37	41.91	42.545
80	54.99	49.53	50.165
100	67.69	62.23	62.865

公差:	版次:	A	上海宗进电子科技有限公司		
	比例:		Shanghai Zong Jin Electron Technology Co.LTD		
. X ±0.35	单位:	mm	型号:	101-1/B-xxP	签名
. XX ±0.25	页码:	1/1	描述:	1.27压线母头	日期
. XXX ±2°	图号:				
LNLGB					