

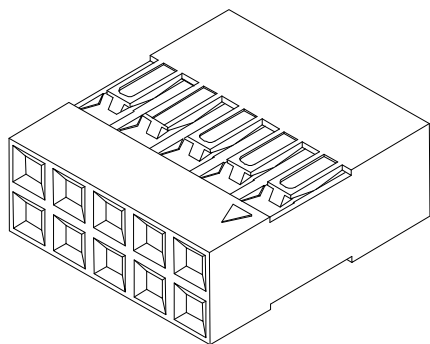
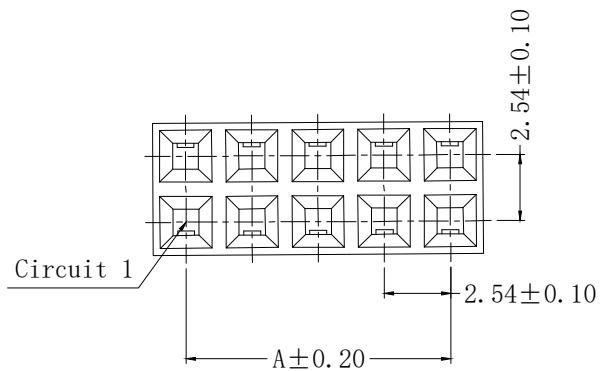


版次	变更内容	审核	日期

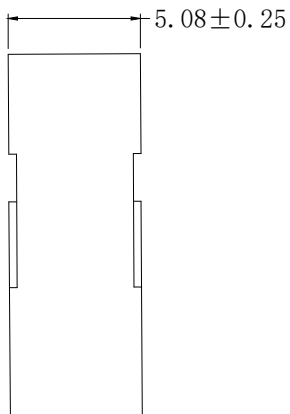

技术参数:

额定电流: 3A AC/DC
 额定电压: 250V AC/DC
 温度范围: -40° C~+85° C
 接触电阻: 20mΩ Max.
 绝缘电阻: 1000MΩ Min.
 耐受电压: 1500V AC/minute
 材 料: PPO, UL94V-0, 黑色

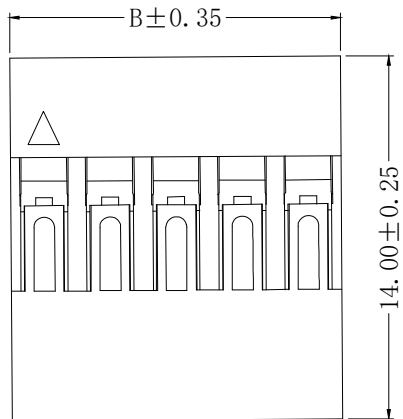

PART NO.	Dimensions		PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B		A	B
1303H-2*02P	2.54	5.08	1303H-2*15P	35.56	38.10	1303H-2*28P	68.58	71.12
1303H-2*03P	5.08	7.62	1303H-2*16P	38.10	40.64	1303H-2*29P	71.12	73.66
1303H-2*04P	7.62	10.16	1303H-2*17P	40.64	43.18	1303H-2*30P	73.66	76.20
1303H-2*05P	10.16	12.70	1303H-2*18P	43.18	45.72	1303H-2*31P	76.20	78.74
1303H-2*06P	12.70	15.24	1303H-2*19P	45.72	48.26	1303H-2*32P	78.74	81.28
1303H-2*07P	15.24	17.78	1303H-2*20P	48.26	50.80			
1303H-2*08P	17.78	20.32	1303H-2*21P	50.80	53.34			
1303H-2*09P	20.32	22.86	1303H-2*22P	53.34	55.88			
1303H-2*10P	22.86	25.40	1303H-2*23P	55.88	58.42			
1303H-2*11P	25.40	27.94	1303H-2*24P	58.42	60.96			
1303H-2*12P	27.94	30.48	1303H-2*25P	60.96	63.50			
1303H-2*13P	30.48	33.02	1303H-2*26P	63.50	66.04			
1303H-2*14P	33.02	35.56	1303H-2*27P	66.04	68.58			

公差:	版次:	A	上海宗进电子科技有限公司			
.X ±0.35	比例:		Shanghai Zong Jin Electron Technology Co.LTD			
.XX ±0.25	单位:	mm	型号:	1303H-2*xxP	签名:	日期:
.XXX	页码:	1/1	描述:	白色连接器	绘图:	袁健 2024.05.08
LNGLB ±2°	图号:		审核:			